

BLENDED TONES

Style	R0802
Construction	Rigid LVT
Installation	Click
Thickness	6.5 mm
Wear Layer	20 mils
Plank Size	12"x 24"
Sq Ft/Carton	19.81
Attached Underlayment	Yes
Bevel	Painted Bevel
Warranty	Lifetime Limited Residential / 10-YR Limited Light Commercial



WATERPROOF



**NO GAP
GUARANTEE**



ALL PET



CASHMERE PEARL | 926



RUSSET | 990



PEBBLESTONE | 925



CORAL REEF | 260



CREMA | 220



ARCTIC WHITE | 120



100% Waterproof



Approved
for any level



Easy to Clean



Repels stains
and liquids



Dent Resistant



TRANSITION AND TRIM PACKAGE

The RevoFit™ moisture resistant molding provides the functionality of a T-Molding and Reducer in a single, easy to install piece. The unique flexible zone design of the RevoFit™ track allows installation of the profile on either direction, thus eliminating the guess work out of positioning the trim.


INSTALLS TWO DIFFERENT WAYS

METHOD 1: T-MOLDING


As a T-Molding transition, the RevoFit™ is designed to accommodate the expansion gap between floors of equal heights ranging from 3-8mm.

METHOD 2: REDUCER

As a Reducer transition, RevoFit™ is designed to accommodate the expansion gap of unequal height floors that have a thickness range of 3-8mm.

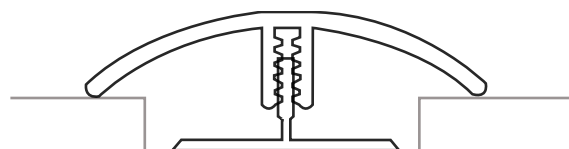

T-MOLDING

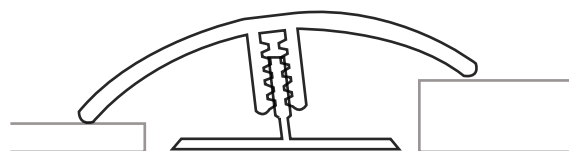

REDUCER

SPECIFICATIONS

- Dimensions: 78.75" X 1.75"
- Core material: PVC
- Surface material: Highly wear resistant PVC
- Primary applications: Luxury Vinyl Flooring
- Patent Pending

PRODUCT ITEM NUMBERS:

STYLE COLOR #	STYLE COLOR NAME	PART NUMBER
926	CASHMERE PEARL	V2IN1-03959
990	RUSSET	V2IN1-03960
925	PEBBLESTONE	V2IN1-03957
260	CORAL REEF	V2IN1-03961
220	CREMA	V2IN1-03958
120	ARCTIC WHITE	V2IN1-03602

MOHAWK VINYL END MOLD TRANSITION PACKAGE


The Mohawk Vinyl End Mold is a moisture resistant molding that is suitable for transitions at doorways, sliding doors, against fireplaces, and when abutting joining rooms have floors of different heights.

INSTALLATION METHOD

The Vinyl End Mold incorporates a universal track system with integrated shims that can be cutoff, or folded under. This allows the transition to work with vinyl floors ranging from 3mm to 8mm in height.

SPECIFICATIONS

- Dimensions: 78.75" X 1.70"
- Core material: Rigid Vinyl
- Surface material: Highly wear resistant PVC
- Primary applications: Luxury Vinyl Flooring


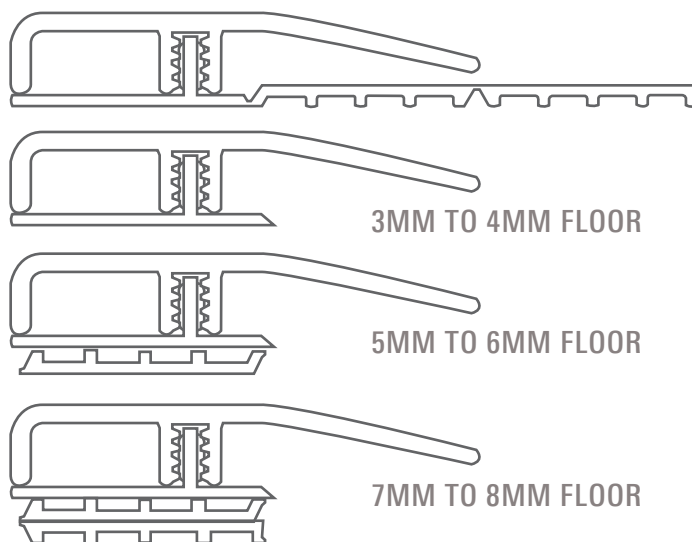


PRODUCT ITEM NUMBERS:

STYLE COLOR #	STYLE COLOR NAME	PART NUMBER
926	CASHMERE PEARL	VEND-03959
990	RUSSET	VEND-03960
925	PEBBLESTONE	VEND-03957
260	CORAL REEF	VEND-03961
220	CREMA	VEND-03958
120	ARCTIC WHITE	VEND-03602

MOHAWK VINYL STAIRNOSE

The Mohawk Vinyl Stairnose is a moisture proof molding that is suitable to finish stair installations of vinyl luxury flooring. The Mohawk Vinyl Stairnose is designed for functionality, versatility, and uniqueness: 1) functional because it can be installed either flush or overlapped, 2) versatile because of its wide-range of LVF compatibility ranging from 2mm in thickness to 7.5mm and 3) unique because, in contrast to the competition, the Mohawk Vinyl Stairnose accommodates bull-nosed as well as squared-nosed stair installations.

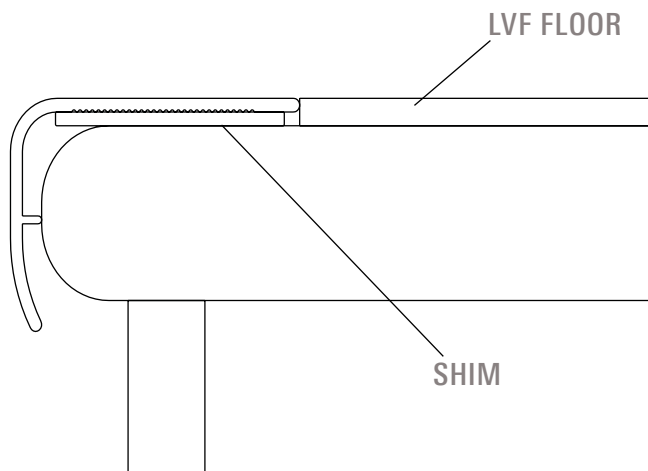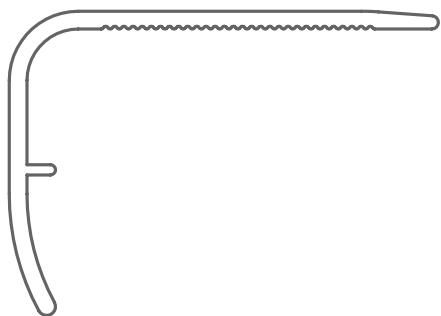

SPECIFICATIONS

- Dimensions: 78.75" x 1.88" x 1.33"
- Core material: PVC
- Surface material: Highly wear resistant PVC
- Primary Application: Luxury Vinyl Flooring
- ADA compliant

STAIRNOSE SHIM SPECIFICATIONS

- Selling Style: VSHIM-01
- Dimensions: 78.75" x 1.25"
- Shim thickness is specific to the LVF thickness

PRODUCT ITEM NUMBERS:

STYLE COLOR #	STYLE COLOR NAME	PART NUMBER
926	CASHMERE PEARL	VSNP-03959
990	RUSSET	VSNP-03960
925	PEBBLESTONE	VSNP-03957
260	CORAL REEF	VSNP-03961
220	CREMA	VSNP-03958
120	ARCTIC WHITE	VSNP-03602