



Q QUICK SHIP
2016 CATALOG



When you need it **NOW**

QUICK SHIP SOLUTIONS

Offering more colors and styles than ever before. Our Quick Ship program provides instant access to hundreds of ready-to-order products that address even the tightest project schedules.

All products are available to ship within 10 business days, with many in stock and ready to ship immediately.

BROADLOOM

Up to 2,000 sq. yds. of selected styles are available in 10 business days.

CARPET TILE

Up to 2,000 sq. yds. available in 10 business days.

LVT

Up to 10,000 sq. ft. available in 10 business days.

RESILIENT SHEET

Up to 2,000 sq. yds. available in 10 business days.

BROADLOOM



COMMINGLE - 989, BLACK VELVET



Up to 2,000 sq. yds. available within 10 business days or less




881 - TOBACCO




579



837



881



883



928



999



QUICK SHIP

Up to 2,000 sq. yds. available within 10 business days

PRODUCT SPECIFICATIONS

STYLE NAME	ALMA MATER
STYLE NUMBER	1E61
FIBER TYPE	COLORSTRAND® SD NYLON
SURFACE APPEARANCE	TEXTURED LOOP
STAIN RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS
SOIL RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS - SOIL TREATMENT
GAUGE	1/10"
PILE THICKNESS	.150"

STITCHES PER INCH	8.7
PILE WEIGHT	22 OZ / YD ²
DENSITY	5176
DYE METHOD	SOLUTION
BACKING	WELDLOK®
INDOOR AIR QUALITY	GLP 83878

FLAMMABILITY: Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

WARRANTIES: Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance (Food & Beverage Only), Lifetime Limited Colorfastness to Light Warranty, 10 Year Limited Colorfastness to Atmospheric Contaminants

Astonishing View



878 - BRIGHT IDEAS



521



589



841



858



869



878



979



QUICK SHIP

Up to 2,000 sq. yds. available within 10 business days or less

PRODUCT SPECIFICATIONS

STYLE NAME	ASTONISHING VIEW	STITCHES PER INCH	11.3
STYLE NUMBER	2B47	PILE WEIGHT	22 OZ / YD ²
FIBER TYPE	COLORSTRAND® NYLON	DENSITY	6769
SURFACE APPEARANCE	GRAPHIC LOOP	DYE METHOD	SOLUTION / SPACE DYED YARN
STAIN RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS	BACKING	WELDLOK®
SOIL RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS - SOIL TREATMENT	INDOOR AIR QUALITY	GLP 8216
GAUGE	1/10"		
PILE THICKNESS	.117"		

FLAMMABILITY: Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

WARRANTIES: Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance (Food & Beverage Only)




872 - FIREWALL



579



595




658



841



872




879



889



919



989



QUICK SHIP

Up to 2,000 sq. yds. available within 10 business days or less

PRODUCT SPECIFICATIONS


STYLE NAME	CHARGED	STITCHES PER INCH	11.0
STYLE NUMBER	1C75	PILE WEIGHT	20 OZ / YD ²
FIBER TYPE	COLORSTRAND® NYLON	DENSITY	4898
SURFACE APPEARANCE	ENHANCED GRAPHIC LOOP	DYE METHOD	SOLUTION / SPACE DYED YARN
STAIN RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS	BACKING	WELDLOK®
SOIL RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS - SOIL TREATMENT	INDOOR AIR QUALITY	GLP 8216
GAUGE	1/10"		
PILE THICKNESS	.147"		

FLAMMABILITY: Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

WARRANTIES: Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance (Food & Beverage Only)



868 - BROWNSTONE



585



641



868



879



979



999



QUICK SHIP

Up to 2,000 sq. yds. available within 10 business days or less

PRODUCT SPECIFICATIONS

STYLE NAME	CLOISONNE II	STITCHES PER INCH	10.0
STYLE NUMBER	5342	PILE WEIGHT	28 OZ / YD ²
FIBER TYPE	COLORSTRAND® NYLON	DENSITY	5200
SURFACE APPEARANCE	GRAPHIC LOOP	DYE METHOD	SOLUTION / YARN
STAIN RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS	BACKING	WELDLOK®
SOIL RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS - SOIL TREATMENT	INDOOR AIR QUALITY	GLP 8216
GAUGE	1/10"		
PILE THICKNESS	.140"		

FLAMMABILITY: Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)


WARRANTIES: Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance (Food & Beverage Only)




989 - BLACK VELVET




131




585



878



968



989



QUICK SHIP

Up to 2,000 sq. yds. available within 10 business days or less

PRODUCT SPECIFICATIONS


STYLE NAME	COMMINGLE	STITCHES PER INCH	12.0
STYLE NUMBER	2B66	DENSITY	5838
FIBER TYPE	COLORSTRAND® NYLON	DYE METHOD	SOLUTION / YARN
SURFACE APPEARANCE	TEXTURED PATTERN LOOP	BACKING	WELDLOK®
STAIN RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS	INDOOR AIR QUALITY	GLP 8216
SOIL RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS - SOIL TREATMENT		
GAUGE	1/12"		
PILE THICKNESS	.111"		

FLAMMABILITY: Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

WARRANTIES: Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance (Food & Beverage Only)




878 - ENVISION



521



589



841



858



869



878



979



QUICK SHIP

Up to 2,000 sq. yds. available within 10 business days or less

PRODUCT SPECIFICATIONS

STYLE NAME	CONTEMPLATE
STYLE NUMBER	2B65
FIBER TYPE	COLORSTRAND® SD NYLON
SURFACE APPEARANCE	GRAPHIC LOOP
STAIN RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS
SOIL RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS - SOIL TREATMENT
GAUGE	1/10"
PILE THICKNESS	.146"

STITCHES PER INCH	12.0
PILE WEIGHT	22 OZ / YD ²
DENSITY	5425
DYE METHOD	SOLUTION
BACKING	WELDLOK®
INDOOR AIR QUALITY	GLP 8216

FLAMMABILITY: Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

WARRANTIES: Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance, Lifetime Limited Colorfastness to Light Warranty, 10 Year Limited Colorfastness to Atmospheric Contaminants



869 - HICKORY



748



832



852



869



968



979



Up to 2,000 sq. yds. available within 10 business days

PRODUCT SPECIFICATIONS

STYLE NAME	DEFENDER 20
STYLE NUMBER	6350
FIBER TYPE	PERMASTRAND™
SURFACE APPEARANCE	LEVEL LOOP
STAIN RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS
SOIL RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS - SOIL TREATMENT
GAUGE	1/10"
PILE THICKNESS	.140"

STITCHES PER INCH	9.67
PILE WEIGHT	20 OZ / YD ²
DENSITY	5220
DYE METHOD	SOLUTION
BACKING	WELDLOK®
INDOOR AIR QUALITY	GLP 3878

FLAMMABILITY: Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

WARRANTIES: 10 Year Limited Wear Warranty, 10 Year Limited Static Protection, 10 Year Limited Stain Resistance (Food & Beverage Only), 10 Year Colorfastness to Light Warranty, 10 Year Limited Colorfastness to Atmospheric Contaminants

PRODUCT SPECIFICATIONS

STYLE NAME	DEFENDER 26
STYLE NUMBER	6355
FIBER TYPE	PERMASTRAND™
SURFACE APPEARANCE	LEVEL LOOP
STAIN RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS
SOIL RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS - SOIL TREATMENT
GAUGE	1/10"
PILE THICKNESS	.163"

STITCHES PER INCH	11.5
PILE WEIGHT	26 OZ / YD ²
DENSITY	5885
DYE METHOD	SOLUTION
BACKING	WELDLOK®
INDOOR AIR QUALITY	GLP 3878


FLAMMABILITY: Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

WARRANTIES: 10 Year Limited Wear Warranty, 10 Year Limited Static Protection, 10 Year Limited Stain Resistance (Food & Beverage Only), 10 Year Colorfastness to Light Warranty, 10 Year Limited Colorfastness to Atmospheric Contaminants

Distinctive Appeal



869 - VIVID VISION



521




589



841



858



869



979



878



QUICK SHIP

Up to 2,000 sq. yds. available within 10 business days or less

PRODUCT SPECIFICATIONS

STYLE NAME	DISTINCTIVE APPEAL	STITCHES PER INCH	11.7
STYLE NUMBER	2B76	DENSITY	7111
FIBER TYPE	COLORSTRAND® SD NYLON	DYE METHOD	SOLUTION
SURFACE APPEARANCE	TEXTURED PATTERNED LOOP	BACKING	WELDLOK® PLUS
STAIN RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS	INDOOR AIR QUALITY	GLP 8216
SOIL RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS - SOIL TREATMENT		
GAUGE	1/12"		
PILE THICKNESS	.081"		

FLAMMABILITY: Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

WARRANTIES: Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance, Lifetime Edge Ravel, Zippering, Delamination And Dimensional Stability, Lifetime Limited Colorfastness to Light Warranty, 10 Year Limited Colorfastness to Atmospheric Contaminants

Aladdin
COMMERCIAL



521 - LIMITLESS POTENTIAL



521



589



841



869



878



979



858



QUICK SHIP

Up to 2,000 sq. yds. available within 10 business days or less

PRODUCT SPECIFICATIONS


STYLE NAME	ENDURING FUNCTION	STITCHES PER INCH	12.0
STYLE NUMBER	2B77	DENSITY	5592
FIBER TYPE	COLORSTRAND® SD NYLON	DYE METHOD	SOLUTION
SURFACE APPEARANCE	TEXTURED PATTERNED LOOP	BACKING	WELDLOK® PLUS
STAIN RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS	INDOOR AIR QUALITY	GLP 8216
SOIL RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS - SOIL TREATMENT		
GAUGE	1/12"		
PILE THICKNESS	.103"		

FLAMMABILITY: Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)


WARRANTIES: Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance, Weldlok® Plus Warranty, Lifetime Limited Edge Ravel, Zippering, Delamination and Dimensional Stability Warranty, Lifetime Limited Colorfastness to Light Warranty, 10 Year Limited Colorfastness to Atmospheric Contaminants



872 - FIREWALL



579



595




658



841



872




879



889



919



989



QUICK SHIP

Up to 2,000 sq. yds. available within 10 business days or less

PRODUCT SPECIFICATIONS

STYLE NAME	ENERGIZED	STITCHES PER INCH	11.33
STYLE NUMBER	1C70	PILE WEIGHT	20 OZ / YD ²
FIBER TYPE	COLORSTRAND® NYLON	DENSITY	5669
SURFACE APPEARANCE	ENHANCED GRAPHIC LOOP	DYE METHOD	SOLUTION / YARN
STAIN RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS	BACKING	WELDLOK®
SOIL RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS - SOIL TREATMENT	INDOOR AIR QUALITY	GLP 8216
GAUGE	1/10"		
PILE THICKNESS	.127"		

FLAMMABILITY: Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

WARRANTIES: Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance (Food & Beverage Only)



862 - DESERT SCENE



128



378



585




595



858



862



888



969



989



QUICK SHIP

Up to 2,000 sq. yds. available within 10 business days or less

PRODUCT SPECIFICATIONS

STYLE NAME	GLOBAL IMAGE
STYLE NUMBER	1F01
FIBER TYPE	COLORSTRAND® SD NYLON
SURFACE APPEARANCE	GRAPHIC LOOP
STAIN RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS
SOIL RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS - SOIL TREATMENT
GAUGE	1/10"
PILE THICKNESS	.110"

STITCHES PER INCH	14.67
PILE WEIGHT	20 OZ / YD ²
DENSITY	6545
DYE METHOD	SOLUTION
BACKING	WELDLOK®
INDOOR AIR QUALITY	GLP 8216

FLAMMABILITY: Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

WARRANTIES: Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance



878 - BRIGHT IDEAS



521



589



841



858



869



878



979



QUICK SHIP

Up to 2,000 sq. yds. available within 10 business days or less

PRODUCT SPECIFICATIONS

STYLE NAME	INSPIRING MOMENT	STITCHES PER INCH	11.7
STYLE NUMBER	2B46	PILE WEIGHT	22 OZ / YD ²
FIBER TYPE	COLORSTRAND® NYLON	DENSITY	6286
SURFACE APPEARANCE	GRAPHIC LOOP	DYE METHOD	SOLUTION / YARN
STAIN RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS	BACKING	WELDLOK®
SOIL RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS - SOIL TREATMENT	INDOOR AIR QUALITY	GLP 8216
GAUGE	1/10"		
PILE THICKNESS	.126"		

FLAMMABILITY: Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

WARRANTIES: Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance (Food & Beverage Only)



876 - NORTH WOODS



852



876



878



988



QUICK SHIP

Up to 2,000 sq. yds. available within 10 business days or less

PRODUCT SPECIFICATIONS

STYLE NAME	INTERPLAY	STITCHES PER INCH	10.33
STYLE NUMBER	4454	PILE WEIGHT	22 OZ / YD2
FIBER TYPE	COLORSTRAND® NYLON	DENSITY	6656
SURFACE APPEARANCE	GRAPHIC LOOP	DYE METHOD	SOLUTION / YARN
STAIN RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS	BACKING	WELDLOK®
SOIL RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS - SOIL TREATMENT	INDOOR AIR QUALITY	GLP 8216
GAUGE	1/10"		
PILE THICKNESS	.119"		

FLAMMABILITY: Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

WARRANTIES: Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance, Lifetime Limited Colorfastness to Light Warranty, 10 Year Limited Colorfastness to Atmospheric Contaminants

Major Factor




959 - TITANIUM




846



847



959



968



QUICK SHIP

Up to 2,000 sq. yds. available within 10 business days or less

PRODUCT SPECIFICATIONS

STYLE NAME	MAJOR FACTOR
STYLE NUMBER	1Y09
FIBER TYPE	COLORSTRAND® SD NYLON
SURFACE APPEARANCE	TEXTURED LOOP
STAIN RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS
SOIL RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS - SOIL TREATMENT
GAUGE	1/8"
PILE THICKNESS	.110"

STITCHES PER INCH	10.2
PILE WEIGHT	20 OZ / YD2
DENSITY	6545
DYE METHOD	SOLUTION
BACKING	WELDLOK®
INDOOR AIR QUALITY	GLP 8216

FLAMMABILITY: Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

WARRANTIES: Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance, Lifetime Limited Colorfastness to Light Warranty, 10 Year Limited Colorfastness to Atmospheric Contaminants



988 - NIGHT GLOW



852



876



878



988



QUICK SHIP

Up to 2,000 sq. yds. available within 10 business days or less

PRODUCT SPECIFICATIONS

STYLE NAME	POINT GUARD	STITCHES PER INCH	10.0
STYLE NUMBER	4412	PILE WEIGHT	22 OZ / YD ²
FIBER TYPE	COLORSTRAND® NYLON	DENSITY	6712
SURFACE APPEARANCE	GRAPHIC LOOP	DYE METHOD	SOLUTION / YARN
STAIN RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS	BACKING	WELDLOK®
SOIL RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS - SOIL TREATMENT	INDOOR AIR QUALITY	GLP 8216
GAUGE	1/10"		
PILE THICKNESS	.118"		

FLAMMABILITY: Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

WARRANTIES: Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance (Food & Beverage Only)



878 - COLLECTIVE WISDOM



521



589



841



858



869



878



979



QUICK SHIP

Up to 2,000 sq. yds. available within 10 business days or less

PRODUCT SPECIFICATIONS

STYLE NAME	PURE & SIMPLE
STYLE NUMBER	2B48
FIBER TYPE	COLORSTRAND® SD NYLON
SURFACE APPEARANCE	GRAPHIC LOOP
STAIN RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS
SOIL RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS - SOIL TREATMENT
GAUGE	1/10"
PILE THICKNESS	.097"

STITCHES PER INCH	12.0
PILE WEIGHT	22 OZ / YD ²
DENSITY	8165
DYE METHOD	SOLUTION
BACKING	WELDLOK®
INDOOR AIR QUALITY	GLP 8216

FLAMMABILITY: Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

WARRANTIES: Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance, Lifetime Limited Colorfastness to Light Warranty, 10 Year Limited Colorfastness to Atmospheric Contaminants



714 - HAZY HUE



559



679



714




822



828



837



838




928



958



959



978



QUICK SHIP

Up to 2,000 sq. yds. available within 10 business days or less

PRODUCT SPECIFICATIONS

STYLE NAME	REAL ELEMENTS
STYLE NUMBER	1Z26
FIBER TYPE	COLORSTRAND® SD NYLON
SURFACE APPEARANCE	GRAPHIC LOOP
STAIN RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS
SOIL RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS - SOIL TREATMENT
GAUGE	1/10"
PILE THICKNESS	.116"

STITCHES PER INCH	11.0
PILE WEIGHT	22 OZ / YD ²
DENSITY	6828
DYE METHOD	SOLUTION
BACKING	WELDLOK®
INDOOR AIR QUALITY	GLP 8216

FLAMMABILITY: Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

WARRANTIES: Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance, Lifetime Limited Colorfastness to Light Warranty, 10 Year Limited Colorfastness to Atmospheric Contaminants



878 - REDEFINED



521



589



841



858



869



878



979



QUICK SHIP

Up to 2,000 sq. yds. available within 10 business days or less

PRODUCT SPECIFICATIONS

STYLE NAME	REPLENISH	STITCHES PER INCH	11.6
STYLE NUMBER	2B62	PILE WEIGHT	22 OZ / YD ²
FIBER TYPE	COLORSTRAND® NYLON	DENSITY	5617
SURFACE APPEARANCE	TEXTURED PATTERNED LOOP	DYE METHOD	SOLUTION / YARN
STAIN RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS	BACKING	WELDLOK®
SOIL RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS - SOIL TREATMENT	INDOOR AIR QUALITY	GLP 8216
GAUGE	1/10"		
PILE THICKNESS	.141"		

FLAMMABILITY: Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

WARRANTIES: Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance (Food & Beverage Only)



878 - REDEFINED



841



878



979



858



589



869



521



QUICK SHIP

Up to 2,000 sq. yds. available within 10 business days or less

PRODUCT SPECIFICATIONS

STYLE NAME	REPURPOSE
STYLE NUMBER	2B61
FIBER TYPE	COLORSTRAND® NYLON
SURFACE APPEARANCE	TEXTURED PATTERNED LOOP
STAIN RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS
SOIL RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS - SOIL TREATMENT
GAUGE	1/10"
PILE THICKNESS	.154"

STITCHES PER INCH	11.6
PILE WEIGHT	22 OZ / YD ²
DENSITY	5143
DYE METHOD	SOLUTION / YARN
BACKING	WELDLOK®
INDOOR AIR QUALITY	GLP 8216

FLAMMABILITY: Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

WARRANTIES: Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance (Food & Beverage Only)




979 - CHARCOAL



383




589




748



852



869



889




949



959



979



999



UP TO 2,000 SQ. YDS. AVAILABLE TO SHIP IN 10 BUSINESS DAYS

PRODUCT SPECIFICATIONS

STYLE NAME	RULE BREAKER
STYLE NUMBER	2B94
FIBER TYPE	ENVIROSTRAND™ SD PET
SURFACE APPEARANCE	LEVEL LOOP
STAIN RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS STAIN
SOIL RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS SOIL
GAUGE	1/10"
PILE THICKNESS	.099"

STITCHES PER INCH	9.0
DENSITY	4716
DYE METHOD	100% SOLUTION DYED
BACKING	WELDLOK®
INDOOR AIR QUALITY	GLP 0350

FLAMMABILITY: Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

WARRANTIES: 10 Year Limited Wear Warranty, 10 Year Static Protection, 10 Year Limited Stain Resistance, 10 Year Limited Colorfastness to Light, 10 Year Limited Colorfastness to Atmospheric Contaminants.

Rule Breaker 20



979 - CHARCOAL



383



589



748



852



869




889



949



959



979



999



UP TO 2,000 SQ. YDS. AVAILABLE TO SHIP IN 10 BUSINESS DAYS

PRODUCT SPECIFICATIONS

STYLE NAME	RULE BREAKER 20	STITCHES PER INCH	12.4
STYLE NUMBER	2B92	PILE WEIGHT	20 OZ / YD ²
FIBER TYPE	ENVIROSTRAND™ SD PET	DENSITY	5592
SURFACE APPEARANCE	LEVEL LOOP	DYE METHOD	100% SOLUTION DYED
STAIN RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS STAIN	BACKING	WELDLOK®
SOIL RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS SOIL	INDOOR AIR QUALITY	GLP 0350
GAUGE	1/10"		
PILE THICKNESS	.137"		

FLAMMABILITY: Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

WARRANTIES: 10 Year Limited Wear Warranty, 10 Year Static Protection, 10 Year Limited Stain Resistance, 10 Year Limited Colorfastness to Light, 10 Year Limited Colorfastness to Atmospheric Contaminants.

Aladdin
COMMERCIAL

Rule Breaker 26



979 - CHARCOAL



383



589



748



852



869




889



949



959



979



999



UP TO 2,000 SQ. YDS. AVAILABLE TO SHIP IN 10 BUSINESS DAYS

PRODUCT SPECIFICATIONS

STYLE NAME	RULE BREAKER 26
STYLE NUMBER	2B93
FIBER TYPE	ENVIROSTRAND™ SD PET
SURFACE APPEARANCE	LEVEL LOOP
STAIN RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS STAIN
SOIL RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS SOIL
GAUGE	1/10"
PILE THICKNESS	.166"

STITCHES PER INCH	12.6
PILE WEIGHT	26 OZ / YD ²
DENSITY	5305
DYE METHOD	100% SOLUTION DYED
BACKING	WELDLOK®
INDOOR AIR QUALITY	GLP 0350

FLAMMABILITY: Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

WARRANTIES: 10 Year Limited Wear Warranty, 10 Year Static Protection, 10 Year Limited Stain Resistance, 10 Year Limited Colorfastness to Light, 10 Year Limited Colorfastness to Atmospheric Contaminants.

Aladdin
COMMERCIAL




878 - ENVISION



521



878




979




589



841



858



869



QUICK SHIP

Up to 2,000 sq. yds. available within 10 business days or less

PRODUCT SPECIFICATIONS

STYLE NAME	RUMINATE
STYLE NUMBER	2B64
FIBER TYPE	COLORSTRAND® SD NYLON
SURFACE APPEARANCE	GRAPHIC LOOP
STAIN RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS
SOIL RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS - SOIL TREATMENT
GAUGE	1/10"
PILE THICKNESS	.141"


STITCHES PER INCH	12.3
PILE WEIGHT	22 OZ / YD ²
DENSITY	5824
DYE METHOD	SOLUTION
BACKING	WELDLOK®
INDOOR AIR QUALITY	GLP 8216

FLAMMABILITY: Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

WARRANTIES: Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance, Lifetime Colorfastness to Light, 10 Year Colorfastness to Atmospheric Contaminants



719 - STEEL GRAY



948



965



879



964



689



679




837




374



978



928



589



999



559



719



Up to 2,000 sq. Yds. Available to ship in 10 business days

PRODUCT SPECIFICATIONS


STYLE NAME	SCHOLARSHIP II	STITCHES PER INCH	6.8
STYLE NUMBER	2B99	PILE WEIGHT	20 OZ/YD ²
FIBER TYPE	COLORSTRAND® SD NYLON	DENSITY	6101
SURFACE APPEARANCE	TEXTURED HEATHERED LOOP	DYE METHOD	100% SOLUTION DYED
STAIN RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS STAIN	BACKING	WELDLOK®
SOIL RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS SOIL	INDOOR AIR QUALITY	GLP 8216
GAUGE	1/10"		
PILE THICKNESS	.118"		

FLAMMABILITY: Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

WARRANTIES: Limited Lifetime Wear, Lifetime Static Protection, Limited Lifetime Colorfastness to Light , 10 Year Limited Stain Resistance, 10 Year Limited Colorfastness to Atmospheric Contaminants.



719 - STEEL GRAY



948



965



879



964



689



679



837



374



978



928




589



999



559



719



Up to 2,000 sq. Yds. Available to ship in 10 business days

PRODUCT SPECIFICATIONS

STYLE NAME	SCHOLARSHIP II 26
STYLE NUMBER	2B100
FIBER TYPE	COLORSTRAND® SD NYLON
SURFACE APPEARANCE	TEXTURED HEATHERED LOOP
STAIN RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS STAIN
SOIL RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS SOIL
GAUGE	1/10"
PILE THICKNESS	.159"

STITCHES PER INCH	9.3
PILE WEIGHT	26 OZ/YD ²
DENSITY	5886
DYE METHOD	100% SOLUTION DYED
BACKING	WELDLOK® PLUS
INDOOR AIR QUALITY	GLP 8216

FLAMMABILITY: Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)


WARRANTIES: Lifetime Limited Wear Warranty, Lifetime Static Protection, Limited Lifetime Edge Ravel, Zippering, Delamination, And Dimensional Stability, Limited Lifetime Colorfastness To Light, 10 Year Limited Stain Resistance, 10 Year Limited Colorfastness To Atmospheric Contaminants.



837 - SIENNA



545



747



837



879



883



999



Up to 2,000 sq. yds. available within 10 business days

PRODUCT SPECIFICATIONS

STYLE NAME	SCHOLARSHIP 26	STITCHES PER INCH	10.33
STYLE NUMBER	6465	PILE WEIGHT	26 OZ / YD ²
FIBER TYPE	COLORSTRAND® SD NYLON	DENSITY	6832
SURFACE APPEARANCE	TEXTURED LOOP	DYE METHOD	SOLUTION
STAIN RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS	BACKING	WELDLOK®
SOIL RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS - SOIL TREATMENT	INDOOR AIR QUALITY	GLP 8216
GAUGE	1/10"		
PILE THICKNESS	.137"		

FLAMMABILITY: Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

WARRANTIES: Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance (Food & Beverage Only), Lifetime Limited Colorfastness to Light Warranty, 10 Year Limited Colorfastness to Atmospheric Contaminants

PRODUCT SPECIFICATIONS

STYLE NAME	SCHOLARSHIP 28	STITCHES PER INCH	11.0
STYLE NUMBER	6466	PILE WEIGHT	28 OZ / YD ²
FIBER TYPE	COLORSTRAND® SD NYLON	PILE WEIGHT	7358
SURFACE APPEARANCE	TEXTURED LOOP	DENSITY	SOLUTION
STAIN RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS	DYE METHOD	WELDLOK®
SOIL RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS - SOIL TREATMENT	BACKING	GLP 8216
GAUGE	1/10"		
PILE THICKNESS	.137"		

FLAMMABILITY: Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

WARRANTIES: Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance, Lifetime Limited Colorfastness to Light Warranty, 10 Year Limited Colorfastness to Atmospheric Contaminants



928 - DUSK



559



565



738



842



928



989



Up to 2,000 sq. yds. available within 10 business days

PRODUCT SPECIFICATIONS

STYLE NAME	SCHOLARSHIP PRISM 26
STYLE NUMBER	5338
FIBER TYPE	COLORSTRAND® SD NYLON
SURFACE APPEARANCE	TEXTURED LOOP
STAIN RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS
SOIL RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS - SOIL TREATMENT
GAUGE	1/10"
PILE THICKNESS	.137"

STITCHES PER INCH	10.33
PILE WEIGHT	26 OZ / YD ²
DENSITY	6832
DYE METHOD	SOLUTION
BACKING	WELDLOK®
INDOOR AIR QUALITY	GLP 8216

FLAMMABILITY: Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

WARRANTIES: Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance (Food & Beverage Only), Lifetime Limited Colorfastness to Light Warranty, 10 Year Limited Colorfastness to Atmospheric Contaminants

PRODUCT SPECIFICATIONS

STYLE NAME	SCHOLARSHIP PRISM 28
STYLE NUMBER	8626
FIBER TYPE	COLORSTRAND® SD NYLON
SURFACE APPEARANCE	TEXTURED LOOP
STAIN RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS
SOIL RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS - SOIL TREATMENT
GAUGE	1/10"
PILE THICKNESS	.137"

STITCHES PER INCH	11.00
PILE WEIGHT	28 OZ / YD ²
DENSITY	7358
DYE METHOD	SOLUTION
BACKING	WELDLOK®
INDOOR AIR QUALITY	GLP 8216

FLAMMABILITY: Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

WARRANTIES: Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance (Food & Beverage Only), Lifetime Limited Colorfastness to Light Warranty, 10 Year Limited Colorfastness to Atmospheric Contaminants



878 - COLLECTIVE WISDOM



521



589



841



858



869



878



979



QUICK SHIP

Up to 2,000 sq. yds. available within 10 business days or less

PRODUCT SPECIFICATIONS

STYLE NAME	SMART & SHARP
STYLE NUMBER	2B49
FIBER TYPE	COLORSTRAND® SD NYLON
SURFACE APPEARANCE	GRAPHIC LOOP
STAIN RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS
SOIL RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS - SOIL TREATMENT
GAUGE	1/10"
PILE THICKNESS	.136"

STITCHES PER INCH	12.0
PILE WEIGHT	22 OZ / YD ²
DENSITY	5824
DYE METHOD	SOLUTION
BACKING	WELDLOK®
INDOOR AIR QUALITY	GLP 8216

FLAMMABILITY: Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

WARRANTIES: Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance, Lifetime Limited Colorfastness to Light Warranty, 10 Year Limited Colorfastness to Atmospheric Contaminants

Surface Purpose



869 - VIVID VISION



521



589



841



858



869



878



979



QUICK SHIP

Up to 2,000 sq. yds. available within 10 business days or less

PRODUCT SPECIFICATIONS

STYLE NAME	SURFACE PURPOSE	STITCHES PER INCH	13.0
STYLE NUMBER	2B75	DENSITY	5877
FIBER TYPE	COLORSTRAND® SD NYLON	DYE METHOD	SOLUTION
SURFACE APPEARANCE	TEXTURED PATTERNED LOOP	BACKING	WELDLOK® PLUS
STAIN RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS	INDOOR AIR QUALITY	GLP 8216
SOIL RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS - SOIL TREATMENT		
GAUGE	1/12"		
PILE THICKNESS	.098"		

FLAMMABILITY: Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

WARRANTIES: Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance, Weldlok® Plus Warranty, Lifetime Limited Edge Ravel, Zippering, Delamination, And Dimensional Stability Warranty, Lifetime Limited Colorfastness to Light Warranty, 10 Year Limited Colorfastness to Atmospheric Contaminants

Town Center II 30




214 - WINE COUNTRY




128



214



330



729



959



979



QUICK SHIP

Up to 2,000 sq. yds. available within 10 business days or less

PRODUCT SPECIFICATIONS

STYLE NAME	TOWN CENTER II 30
STYLE NUMBER	1E73
FIBER TYPE	COLORSTRAND® NYLON
SURFACE APPEARANCE	DENSE CUT PILE
STAIN RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS
SOIL RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS - SOIL TREATMENT
GAUGE	1/10"
PILE THICKNESS	.220"

STITCHES PER INCH	10.33
PILE WEIGHT	30 OZ / YD ²
DENSITY	4909
DYE METHOD	PIECE DYED
BACKING	WELDLOK®
INDOOR AIR QUALITY	GLP 6678

FLAMMABILITY: Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

WARRANTIES: Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance (Food & Beverage Only)

Transversal Approach



521 - LIMITLESS POTENTIAL



521



589



841



858



869



878



979



QUICK SHIP

Up to 2,000 sq. yds. available within 10 business days or less

PRODUCT SPECIFICATIONS

STYLE NAME	TRANSVERSAL APPROACH	STITCHES PER INCH	12.0
STYLE NUMBER	2B78	DENSITY	4881
FIBER TYPE	COLORSTRAND® SD NYLON	DYE METHOD	SOLUTION
SURFACE APPEARANCE	TEXTURED PATTERNED LOOP	BACKING	WELDLOK® PLUS
STAIN RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS	INDOOR AIR QUALITY	GLP 8216
SOIL RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS - SOIL TREATMENT		
GAUGE	1/12"		
PILE THICKNESS	.118"		

FLAMMABILITY: Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

WARRANTIES: Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance, Weldlok® Plus Warranty, Lifetime Limited Edge Ravel, Zippering, Delamination and Dimensional Stability Warranty, Lifetime Limited Colorfastness to Light Warranty, 10 Year Limited Colorfastness to Atmospheric Contaminants




714 - HAZY HUE




559




679



714



822



828




837




838




928



958



959



978



QUICK SHIP

Up to 2,000 sq. yds. available within 10 business days or less


PRODUCT SPECIFICATIONS

STYLE NAME	TRUE FORM
STYLE NUMBER	1Z30
FIBER TYPE	COLORSTRAND® SD NYLON
SURFACE APPEARANCE	GRAPHIC LOOP
STAIN RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS
SOIL RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS - SOIL TREATMENT
GAUGE	1/10"
PILE THICKNESS	.118"

STITCHES PER INCH	10.7
PILE WEIGHT	22 OZ / YD ²
DENSITY	6712
DYE METHOD	SOLUTION
BACKING	WELDLOK®
INDOOR AIR QUALITY	GLP 8216

FLAMMABILITY: Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)


WARRANTIES: Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance, Lifetime Limited Colorfastness to Light Warranty, 10 Year Limited Colorfastness to Atmospheric Contaminants

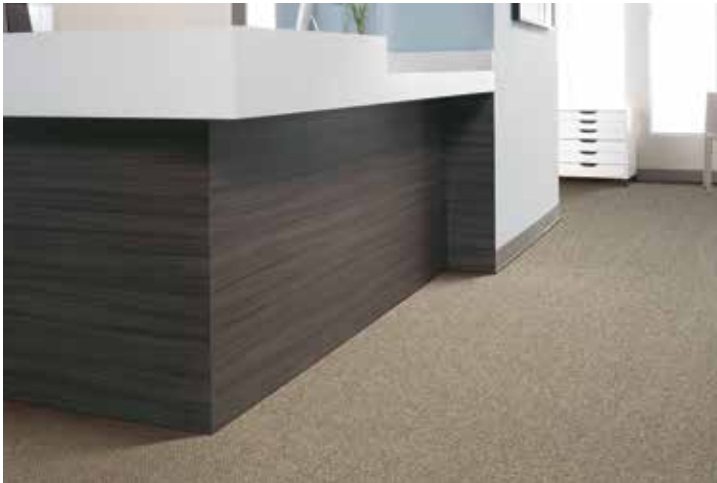

837 - SIENNA



545



747



837



879



883



999



Up to 2,000 sq. yds. available within 10 business days

PRODUCT SPECIFICATIONS

STYLE NAME	TUITION 26	STITCHES PER INCH	10.33
STYLE NUMBER	6636	PILE WEIGHT	26 OZ / YD ²
FIBER TYPE	COLORSTRAND® SD NYLON	DENSITY	6832
SURFACE APPEARANCE	TEXTURED LOOP	DYE METHOD	SOLUTION
STAIN RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS	BACKING	WELDLOK® UNITARY
SOIL RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS - SOIL TREATMENT	INDOOR AIR QUALITY	GLP 8216
GAUGE	1/10"		
PILE THICKNESS	.137"		

FLAMMABILITY: Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

WARRANTIES: Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance (Food & Beverage Only), Weldlok® Unitary Warranty, Lifetime Edge Ravel, Zippering, Delamination & Dimensional Stability, Lifetime Limited Colorfastness to Light Warranty, 10 Year Limited Colorfastness to Atmospheric Contaminants

PRODUCT SPECIFICATIONS

STYLE NAME	TUITION 28	STITCHES PER INCH	11.0
STYLE NUMBER	6637	PILE WEIGHT	28 OZ / YD ²
FIBER TYPE	COLORSTRAND® SD NYLON	DENSITY	7358
SURFACE APPEARANCE	TEXTURED LOOP	DYE METHOD	SOLUTION
STAIN RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS	BACKING	WELDLOK® UNITARY
SOIL RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS - SOIL TREATMENT	INDOOR AIR QUALITY	GLP 8216
GAUGE	1/10"		
PILE THICKNESS	.137"		

FLAMMABILITY: Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

WARRANTIES: Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance, Weldlok® Unitary Warranty, 10 Year Edge Ravel, 10 Year No Zippering, Lifetime Limited Colorfastness to Light Warranty, 10 Year Limited Colorfastness to Atmospheric Contaminants



928 - DUSK



559



565



738



842



928



989



Up to 2,000 sq. yds. available within 10 business days

PRODUCT SPECIFICATIONS

STYLE NAME	TUITION PRISMS 26	STITCHES PER INCH	10.33
STYLE NUMBER	8625	PILE WEIGHT	26 OZ / YD ²
FIBER TYPE	COLORSTRAND® SD NYLON	DENSITY	6832
SURFACE APPEARANCE	TEXTURED LOOP	DYE METHOD	SOLUTION
STAIN RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS	BACKING	WELDLOK® UNITARY
SOIL RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS - SOIL TREATMENT	INDOOR AIR QUALITY	GLP 8216
GAUGE	1/10"		
PILE THICKNESS	.137"		

FLAMMABILITY: Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

WARRANTIES: Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance, 10 Year Edge Ravel, 10 Year No Zippering

PRODUCT SPECIFICATIONS


STYLE NAME	TUITION PRISMS 28	STITCHES PER INCH	11.00
STYLE NUMBER	8660	PILE WEIGHT	28 OZ / YD ²
FIBER TYPE	COLORSTRAND® SD NYLON	DENSITY	7358
SURFACE APPEARANCE	TEXTURED LOOP	DYE METHOD	SOLUTION
STAIN RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS	BACKING	WELDLOK® UNITARY
SOIL RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS - SOIL TREATMENT	INDOOR AIR QUALITY	GLP 8216
GAUGE	1/10"		
PILE THICKNESS	.137"		

FLAMMABILITY: Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

WARRANTIES: Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance, 10 Year Edge Ravel, 10 Year No Zippering




862 - DESERT SCENE



128




378



585



595




858



862



888



869



989



QUICK SHIP

Up to 2,000 sq. yds. available within 10 business days or less

PRODUCT SPECIFICATIONS

STYLE NAME	WORLD VISION
STYLE NUMBER	1F06
FIBER TYPE	COLORSTRAND® SD NYLON
SURFACE APPEARANCE	GRAPHIC LOOP
STAIN RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS
SOIL RELEASE TECHNOLOGY	MOHAWK PROTECTION PLUS - SOIL TREATMENT
GAUGE	1/10"
PILE THICKNESS	.122"

STITCHES PER INCH	12.0
PILE WEIGHT	20 OZ / YD ²
DENSITY	5902
DYE METHOD	SOLUTION
BACKING	WELDLOK®
INDOOR AIR QUALITY	GLP 83878

FLAMMABILITY: Pill Test - 16CFR-1630.4 (FF-1-70): Pass, Critical Radiant Flux (ASTM E-648): CLASS I, Smoke Density (ASTM E-622) Less than 450 (Flame mode)

WARRANTIES: Lifetime Limited Wear Warranty, Lifetime Static Protection, 10 Year Limited Stain Resistance, Lifetime Limited Colorfastness to Light Warranty, 10 Year Limited Colorfastness to Atmospheric Contaminants

